Hollister Gas, Distribution Integrity

To: City Council, Budget Committee

From: Marissa Harmon, Distribution Integrity Engineer

Date: 20 April 2027

Re: Accelerated Main Replacement Program 2027-2029: five of 12 districts designated

Under section 2.1 of the program guidelines, five districts are designated for 2027 to 2029: **Brennan Hill, Elmwood, Fenwick, Harlow and Ivers**. Each emitted 3.30 tonnes of leak methane or more per mile of cast-iron and bare-steel main in 2026; the lowest of them is Harlow at 3.69, and the nearest district below the line is Juniper at 2.95.

Most of a surveyed leak's methane is emitted before the crew finds it, so the inventory has to date each leak's start. Leaks reported by the public are found within days of starting, and 62.6 per cent of them started in December to March, when the ground freezes on the old mains. A leak found on the yearly walk began somewhere in the year since the segment was last walked, and we dated it by that seasonal pattern rather than at the midpoint of the year: a district walked in October or November finds leaks that have been emitting since the winter, one walked in March or April finds leaks a few weeks old. That is why Brennan Hill, Fenwick and Harlow, walked late in the year, are on the list and spring-walked Ashby is not.

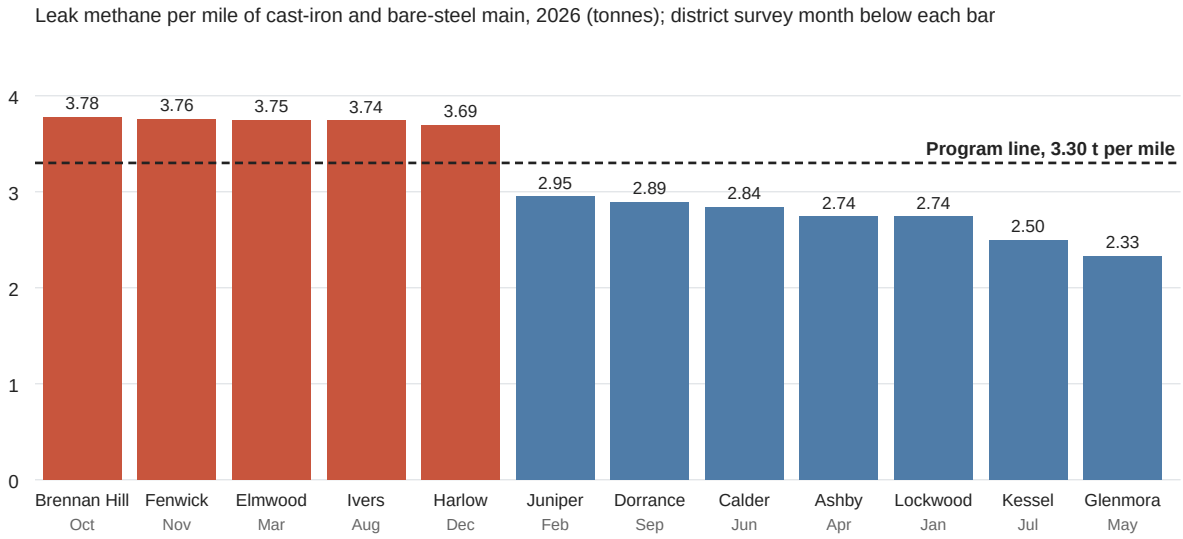

Figure 1. Each district's 2026 leak methane per mile against the program line (guidelines 2.1). Source: leak survey finds, odor call log and repair orders, 2026; GIS main segments at 31 December 2026.

Table 1. Every district's inventory and the two figures section 3.1 asks for the hearing.

District	Leaks found	Methane (t)	CI/BS miles	Per mile (t)	Designated	Leak repair cost 2026	Customer interruptions
Ashby	72	137.6	50.3	2.74	No	$391,294	134
Brennan Hill	78	190.3	50.3	3.78	Yes	$392,367	177
Calder	68	153.5	54.0	2.84	No	$372,257	182
Dorrance	49	123.7	42.8	2.89	No	$246,769	116
Elmwood	114	199.3	53.1	3.75	Yes	$617,746	248
Fenwick	89	189.0	50.3	3.76	Yes	$350,452	122

District	Leaks found	Methane (t)	CI/BS miles	Per mile (t)	Designated	Leak repair cost 2026	Customer interruptions
Glenmora	68	131.4	56.4	2.33	No	$365,620	112
Harlow	88	157.9	42.8	3.69	Yes	$370,241	142
Ivers	79	165.9	44.4	3.74	Yes	$437,290	160
Juniper	70	153.7	52.1	2.95	No	$414,327	186
Kessel	52	107.6	43.0	2.50	No	$266,418	133
Lockwood	64	141.2	51.5	2.74	No	$352,142	195