
Every replacement zone finished by 2037 at $25.4 million a year

Board of Directors, 19 January 2027, item 6: capital improvement plan 2027 to 2037. From Gregory Sheppard, LSLR Programme Manager, with Bethany Davidson, District Engineer. Prepared 11 January 2027.

At the capital plan's $25.4 million a year from 2027, plan revision 2 finishes all twelve zones inside the Lead and Copper Rule Improvements deadline. The last zone, RZ-06 Wexley, is finished in programme year 2037, before 1 November 2037: the running plan cost reaches $268.3 million, 10.56 years of the appropriation. The board can adopt the construction line as drafted.

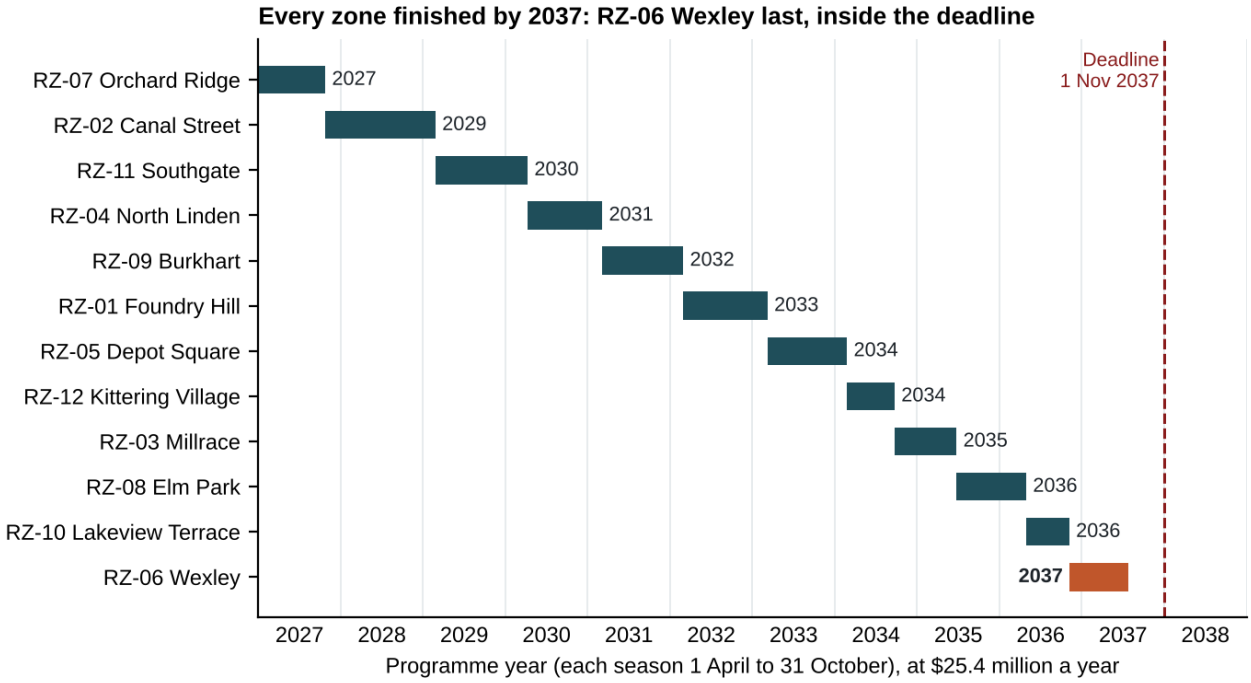

Zones in priority order; each bar runs from the zone's start to its finish on the running total of plan cost against the appropriation (plan 5.2 and 5.3).

Zone schedule

Priority	Zone	Lead and GRR lines to replace	Plan cost ($ million)	Finish year
1	RZ-07 Orchard Ridge	1,250	20.7	2027
2	RZ-02 Canal Street	1,820	34.0	2029
3	RZ-11 Southgate	1,650	28.4	2030
4	RZ-04 North Linden	1,180	23.0	2031
5	RZ-09 Burkhart	1,380	25.0	2032
6	RZ-01 Foundry Hill	1,540	26.0	2033
7	RZ-05 Depot Square	1,390	24.5	2034
8	RZ-12 Kittering Village	760	14.7	2034
9	RZ-03 Millrace	1,050	19.1	2035
10	RZ-08 Elm Park	1,170	21.5	2036
11	RZ-10 Lakeview Terrace	670	13.3	2036
12	RZ-06 Wexley	890	18.1	2037

Lines to the nearest ten and costs to the nearest $100,000, 2027 dollars at the 2027 unit cost schedule with one $230,000 mobilisation per zone.

How the unknown lines are costed

Plan 4.3 carries each Lead Status Unknown line at the share of lead or GRR expected among the district's Lead Status Unknown lines of its construction era. Services were laid with the main they tap, so the tap cards that survive on a main show what its lines without a card are likely to be. Among the lines with no tap card that crews have verified, 13 in 14 on mains whose cards read lead or galvanized proved lead or GRR, and 1 in 19 on mains whose cards read only copper or plastic; the rate is the same on the replaced mains and on single-line visits, and in every era. The lines still unknown sit on lead or galvanized mains far less often than the lines verified so far (38, 25 and 2 per cent of the unknown lines by era, against 91, 74 and 20 per cent of the verified ones), so the 9,939, 9,023 and 14,569 unknown lines are expected to hold 3,871, 2,415 and 1,081 lead or GRR lines, shares of 0.389, 0.268 and 0.074. Priced at the shares found across every verification on file (0.852, 0.703 and 0.225) the same plan would run to 2042; at the shares on the replaced mains, to 2040; at the share of tap cards that read lead or galvanized, to 2039.

What a full replacement cost in 2026

Paid per full replacement completed, by quarter of 2026 (Eastern time), in dollars: bid price, extra service length and restoration on each site's latest closing, with each approved change order counted once.

Contract	Contractor	Q1	Q2	Q3	Q4
2026-LSL-01	Brannigan Excavating Inc	14,395	13,488	13,407	13,344
2026-LSL-02	Tri-County Underground	14,634	13,985	13,922	13,867
2026-LSL-03	Kestrel Pipe and Utility	15,294	14,515	14,636	14,444

Tri-County Underground's vendor number changed on 13 July 2026 after its acquisition; its contract did not, and both vendor numbers are counted under 2026-LSL-02.

Access agreements in hand

Priority	Zone	Service lines with a signed access agreement
1	RZ-07 Orchard Ridge	960
2	RZ-02 Canal Street	1,186
3	RZ-11 Southgate	1,077
4	RZ-04 North Linden	1,020
5	RZ-09 Burkhart	991
6	RZ-01 Foundry Hill	878
7	RZ-05 Depot Square	846
8	RZ-12 Kittering Village	504
9	RZ-03 Millrace	633
10	RZ-08 Elm Park	685
11	RZ-10 Lakeview Terrace	386
12	RZ-06 Wexley	607

Distinct service lines open in the plan with a right-of-entry agreement signed and not withdrawn at 8 January 2027, including forms owners e-signed on the portal that the agreement system does not hold, in the zone the inventory gives each line under plan revision 2; some forms signed before the revision print a different zone.