
Every replacement zone finished by 2037 at $25.4 million a year

Board of Directors, 19 January 2027, item 6: capital improvement plan 2027 to 2037. From Gregory Sheppard, LSLR Programme Manager, with Bethany Davidson, District Engineer. Prepared 11 January 2027.

At the capital plan's $25.4 million a year from 2027, plan revision 2 finishes all twelve zones inside the Lead and Copper Rule Improvements deadline. The last zone, RZ-06 Wexley, is finished in programme year 2037, before 1 November 2037: the plan cost of the twelve zones is $267 million, 10.5 years of the appropriation. The board can adopt the construction line as drafted.

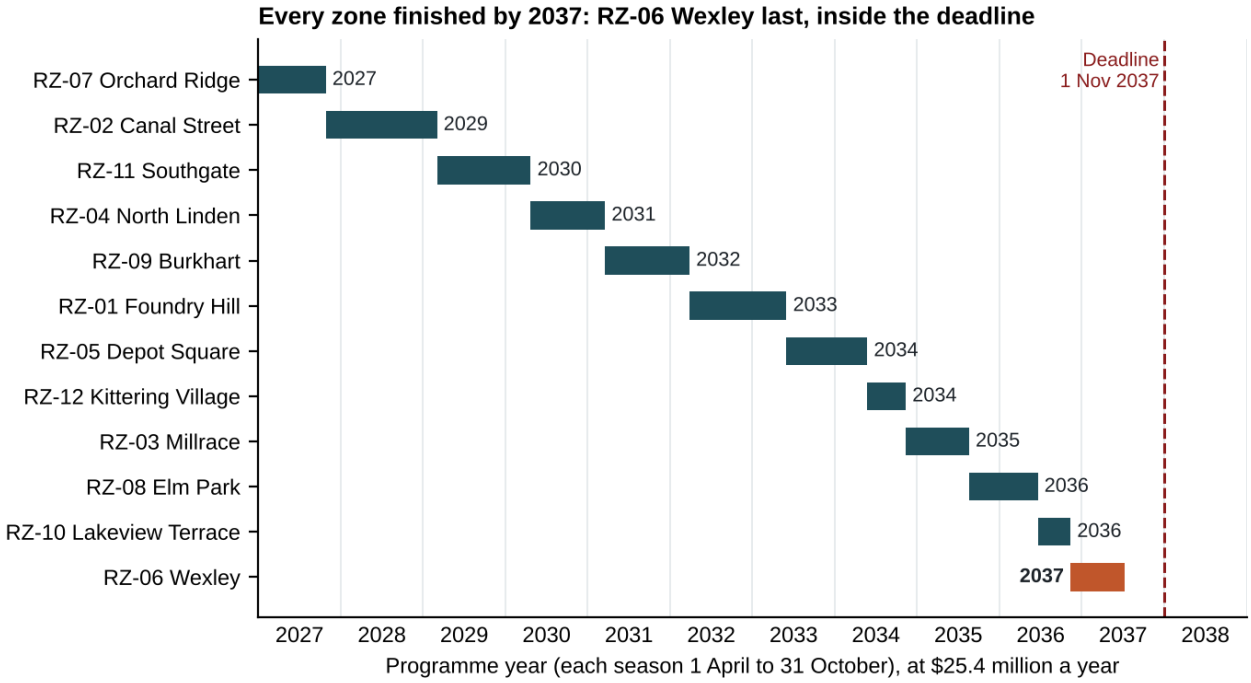

Zones in priority order; each bar runs from the zone's start to its finish on the running total of plan cost against the appropriation (plan 5.2 and 5.3).

Zone schedule

Priority	Zone	Lead and GRR lines to replace	Plan cost ($ million)	Finish year
1	RZ-07 Orchard Ridge	1,210	20.8	2027
2	RZ-02 Canal Street	1,710	34.3	2029
3	RZ-11 Southgate	1,570	28.9	2030
4	RZ-04 North Linden	1,070	22.9	2031
5	RZ-09 Burkhart	1,440	26.1	2032
6	RZ-01 Foundry Hill	1,730	29.9	2033
7	RZ-05 Depot Square	1,320	24.9	2034
8	RZ-12 Kittering Village	550	11.9	2034
9	RZ-03 Millrace	1,020	19.5	2035
10	RZ-08 Elm Park	1,080	21.2	2036
11	RZ-10 Lakeview Terrace	450	10.1	2036
12	RZ-06 Wexley	710	16.6	2037

Lines to the nearest ten and costs to the nearest $100,000, 2027 dollars at the 2027 unit cost schedule with one $230,000 mobilisation per zone.

How the unknown lines are costed

Plan 4.3 carries each Lead Status Unknown line at the share of lead or GRR expected among the district's Lead Status Unknown lines of its construction era. Services were laid with the main they tap, so the tap cards that survive on a main show what kind of street a line without a card sits on, and who laid the services changed with the decades. Among the lines with no tap card that crews have verified, those on mains whose cards read lead or galvanized proved lead or GRR at 99.2 per cent when built before 1930, 95.0 per cent when built 1930 to 1949 and 60.6 per cent when built 1950 to 1988; on mains whose cards read only copper or plastic, 1 of 1,014, 2 of 1,123 and none of 1,666. The rates are alike on the replaced mains and on single-line visits. The lines still unknown sit on lead or galvanized mains far less often than the lines verified so far (47, 27 and 2 per cent of the unknown lines by era, against 74, 55 and 10 per cent of the verified ones), so the 8,890, 7,851 and 13,200 unknown lines are expected to prove lead or GRR at shares of 0.47, 0.26 and 0.01. Priced at the shares found across every verification on file (0.735, 0.524 and 0.061) the same plan would run to 2039; at the shares on the replaced mains, to 2041; at the share of tap cards that read lead or galvanized, to 2040.

What a full replacement cost in 2026

Paid per full replacement completed, by quarter of 2026 (Eastern time), in dollars: bid price, extra service length and restoration on each site's latest closing, with each approved change order counted once.

Contract	Contractor	Q1	Q2	Q3	Q4
2026-LSL-01	Brannigan Excavating Inc	13,944	13,378	13,402	13,303
2026-LSL-02	Tri-County Underground	14,401	13,741	14,096	13,944
2026-LSL-03	Kestrel Pipe and Utility	15,545	14,166	14,328	14,260

Tri-County Underground's vendor number changed on 13 July 2026 after its acquisition; its contract did not, and both vendor numbers are counted under 2026-LSL-02.

Access agreements in hand

Priority	Zone	Service lines with a signed access agreement
1	RZ-07 Orchard Ridge	862
2	RZ-02 Canal Street	1,147
3	RZ-11 Southgate	1,084
4	RZ-04 North Linden	1,000
5	RZ-09 Burkhart	906
6	RZ-01 Foundry Hill	854
7	RZ-05 Depot Square	762
8	RZ-12 Kittering Village	403
9	RZ-03 Millrace	613
10	RZ-08 Elm Park	642
11	RZ-10 Lakeview Terrace	300
12	RZ-06 Wexley	541

Distinct service lines open in the plan with a right-of-entry agreement signed and not withdrawn at 8 January 2027, including forms owners e-signed on the portal that the agreement system does not hold, in the zone the inventory gives each line under plan revision 2; some forms signed before the revision print a different zone.