
Five dwellings for the October acoustic treatment slot

To Aiden Hawthorn, operations manager. From Keelan Moher, environmental engineer. 16 October 2026. Autumn 2026 noise survey, Tulcarra Foods Drumlorne. Slot to be ordered Monday 26 October.

The survey put a meter at each of the fourteen positions in the schedule for two weeks between 31 August and 11 October. The specific sound level below is the plant's own contribution at the dwelling over the assessment period, with the residual sound of each position's surroundings taken off in energy. The five dwellings the slot reaches are NSL04 (DW-101), NSL11 (DW-104), NSL07 (DW-110), NSL02 (DW-103), NSL13 (DW-105). NSL06 is the first dwelling off the list, 1.3 dB below the fifth.

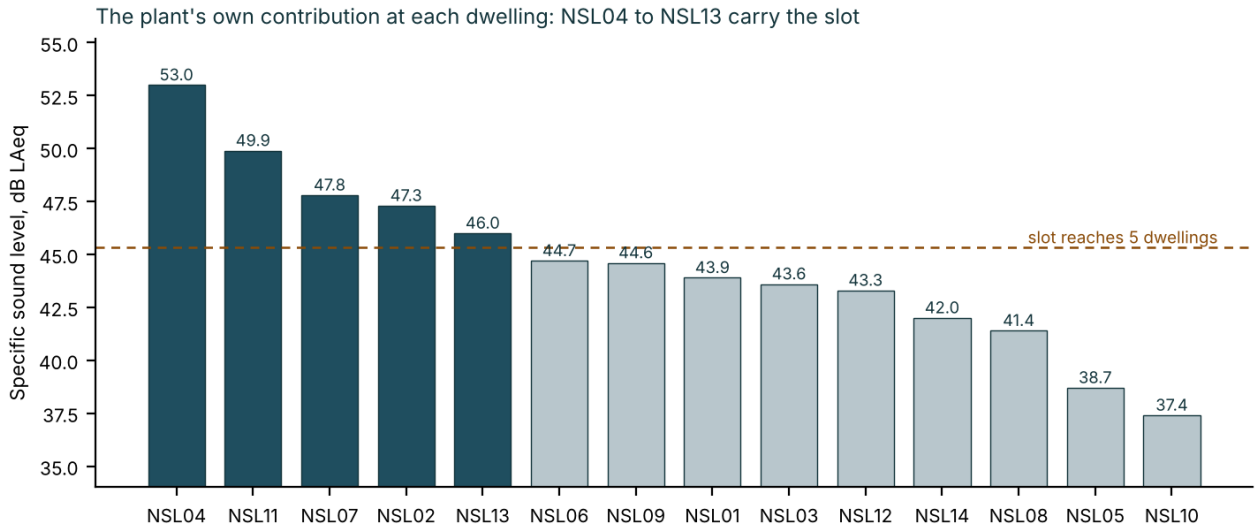

What the slot covers

Position	Dwelling	Specific sound level, dB LAeq	Glazing
NSL04	DW-101, cottage, plant boundary field	53.0	with acoustic trickle vents
NSL11	DW-104, dormer, plant access road	49.9	with acoustic trickle vents
NSL07	DW-110, farmhouse, Coolnagree	47.8	with acoustic trickle vents
NSL02	DW-103, farmhouse, Drumlorne Upper	47.3	with acoustic trickle vents
NSL13	DW-105, cottage, Drumlorne Upper	46.0	standard unit

A tone is prominent at 4 of the five, and those four take the glazing with acoustic trickle vents; NSL13 takes the standard unit.

The plant through the survey

The plant ran to its ordinary pattern in every one of the six weeks, so the positions measured in different weeks are comparable.

Week beginning	Biogas burned, m3	Blower air delivered, thousand Nm3	Centrifuge runs
31 August	35,389	689	12
7 September	34,824	678	13
14 September	34,933	679	10
21 September	36,028	700	12
28 September	34,377	669	11
5 October	35,230	686	13

Levels are to one decimal place. Minutes the met mast showed as wet or windy are out of every level, as the plan requires, and the two meters whose field checks sat away from the calibrator have been corrected.