
Default Home Plan households onto Design C (Stepped) from 1 July 2027: it lowers the 2027-28 design-day maximum by 11 MW, and Designs A and B would raise it

Moving every flat-rate (Home Plan) residential customer onto Design C from 1 July 2027, with the same right to return to the Home Plan that trial households had, lowers the 2027-28 summer maximum demand at 50% probability of exceedance by 11 MW. Design A would raise it by 5 MW and Design B by 20 MW. Keeping the Home Plan leaves it at the forecast's 214.6 MW.

Design	Change to the 2027-28 maximum demand at 50% POE	When the design-day maximum falls
Design C (Stepped)	11 MW lower	8.00 to 8.30 pm
Design A (Evening 3 to 9)	5 MW higher	9.00 to 9.30 pm
Design B (Evening 4 to 8)	20 MW higher	8.00 to 8.30 pm

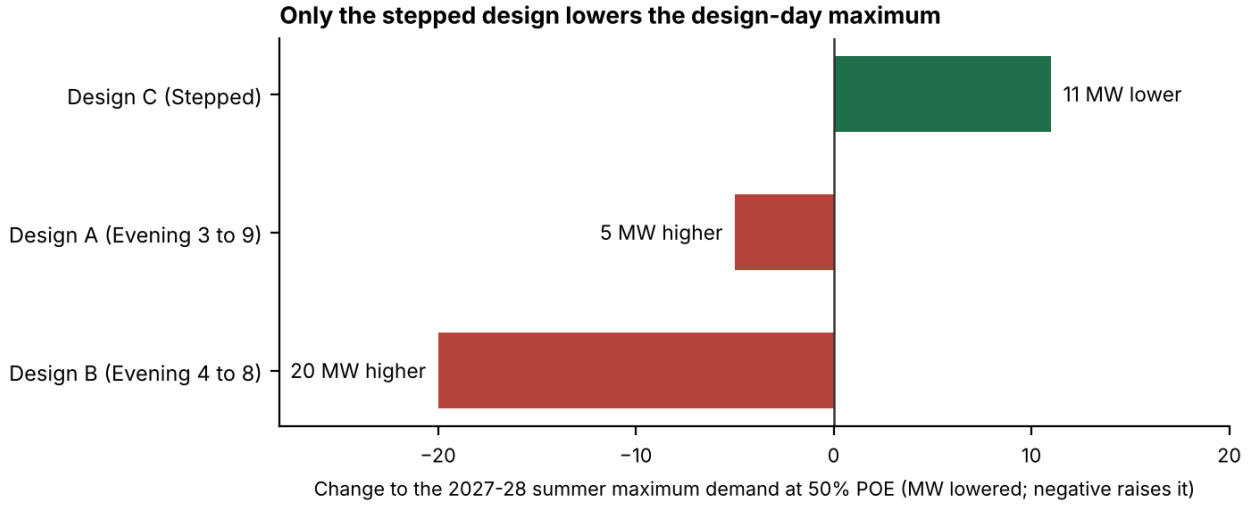

Why the two evening designs raise the maximum

Households on a design set their air conditioners up through the higher-priced hours and pull the heat back out when the price falls. On the hottest trial workdays that pull-down, every responding home at once, was larger than the cut it repaid. Added to the forecast's design day, it moves the maximum out of the window: to the half-hour from 8 pm under Design B and from 9 pm under Design A, both above today's maximum. Design C's shoulders split the return between 8 pm and 10 pm, and its maximum falls at 8 pm, below the forecast's.

How the changes were worked out

Each design's effect is its households' demand less the control households', as assigned (households that returned to the Home Plan or left stay in their design's count), for every half-hour of the trial workdays at the design day's heat: 7 workdays at 43.7 to 45.3 degrees, against the design day's 44.6, with no other workday above 39.7. Each half-hour's effect is multiplied by the forecast's 41,860 Home Plan customers for 2027-28 and added to the 2027-28 50% POE design-day profile; the change is the forecast maximum less the highest half-hour of the new profile.

Changes are to the nearest megawatt. The trial's ordinary workdays do not stand for the design day: on them the pull-down after the window is small, and reading the effect there, or only inside the windows, would rank Design A or Design B first.