
TM107 relining: flush TM112 and IC05 before 15 March 2027

To: Karl North, Head of Network Operations. From: Lauren Dobson, Network Operations Planner. 20 November 2026. Ref: TM107 outage plan v1.0, NOS 12 section 4 assessment.

Flush two mains before the relining starts on 15 March 2027: TM112 Coldharbour Road main and IC05 Coldharbour-Ferrars interconnector.

The relining arrangement loads six trunk mains above their normal flow. Four of them (IC03, TM104, TM109, TM110) carried more water in the June and July 2026 Mill Road jobs than the relining will send them, so their deposits have already been worked at those flows and they need no flushing. TM112 carried at most 65 l/s in the year (Brook Street relining, spring 2026) against 140 l/s during the works, and IC05 has not been in service at all.

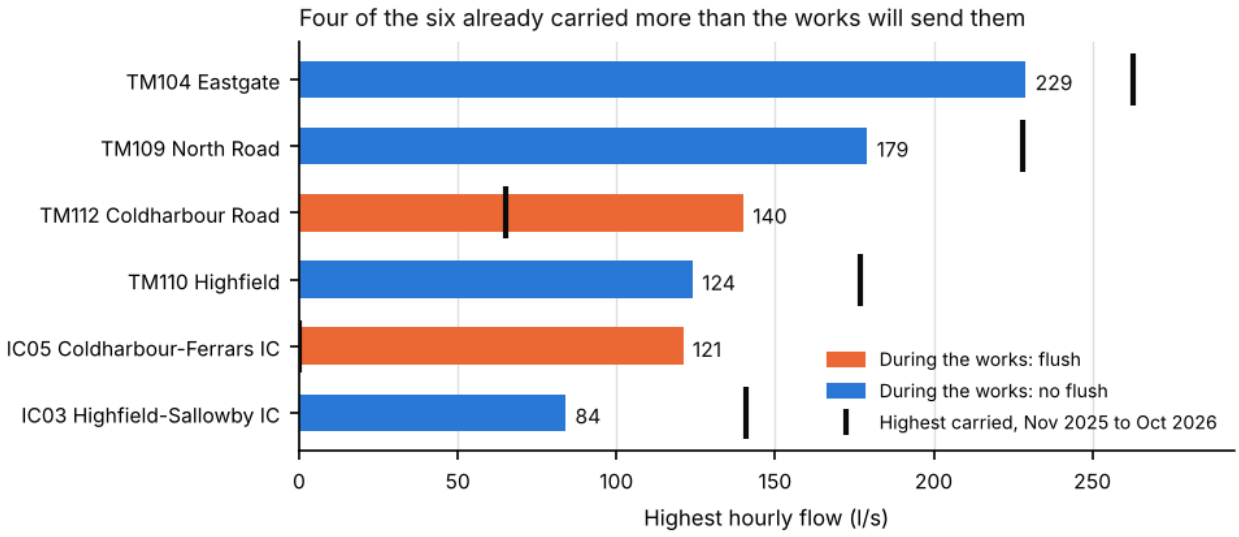

Source: district inlet meters (historian, hourly), control room valve log, trunk mains register, outage plan v1.0.

Main	Name	During the works (l/s)	Carried, Nov 2025 to Oct 2026 (l/s)	Flush
IC03	Highfield-Sallowby interconnector	84	141	No
IC05	Coldharbour-Ferrars interconnector	121	0	Yes
TM104	Eastgate main	229	263	No
TM109	North Road main	179	228	No
TM110	Highfield main	124	177	No
TM112	Coldharbour Road main	140	65	Yes

Basis. No trunk main is metered, so each main's hourly flow is rebuilt from the district inlet meters through the valve positions in force that hour (control room valve log, local time, against the trunk mains register). Flows during the works are the outage plan's valve changes applied to the districts' recorded inflows for 15 March to 15 September 2026 (NOS 12, 4.3); a main is flushed where that flow passes the highest hourly flow it carried in November 2025 to October 2026 (NOS 12, 4.2). The flushing water per 100 m and the non-household water for the re-routed districts are in ferrars_lane_flushing_2027.xlsx.

IC05's boundary valve was worked twice in the year under the exercising programme, cracked a few turns and reshut each time; it carried no water.