
Home Battery Programme: Yarrandale Valley takes the 2027 round

Brief for the Minister for Energy. Brianna Parrish, Director, Home Battery Programme. 12 November 2026.

Recommendation. Run the 2027 round in Yarrandale Valley, then Sandhaven Coast in 2028, Eastbrook Metro in 2029 and Tarrock Highlands in 2030. The 2027 round would deliver about 5,900 MWh a year to its homes, against about 4,600 MWh for a round in Sandhaven Coast, the next best.

Round	Region	kWh a battery a year	MWh a round a year
2027	Yarrandale Valley	2,450	5,900
2028	Sandhaven Coast	1,900	4,600
2029	Eastbrook Metro	1,500	3,600
2030	Tarrock Highlands	1,300	3,100

Why Yarrandale Valley first. Most of its panel homes are in Riverbend Estate and Quarry Hill Estate, where Southmark limits export to 0.5 kW. Their inverters hold output to the home's use plus that limit, so the 2025 readings show only part of what their arrays produce. A battery takes the energy the limit holds back, and these families use it in the evening. Valued on the solar their arrays would have produced, a battery there delivers about 2,450 kWh a year, the most of any region; on the readings as recorded it would look like the least.

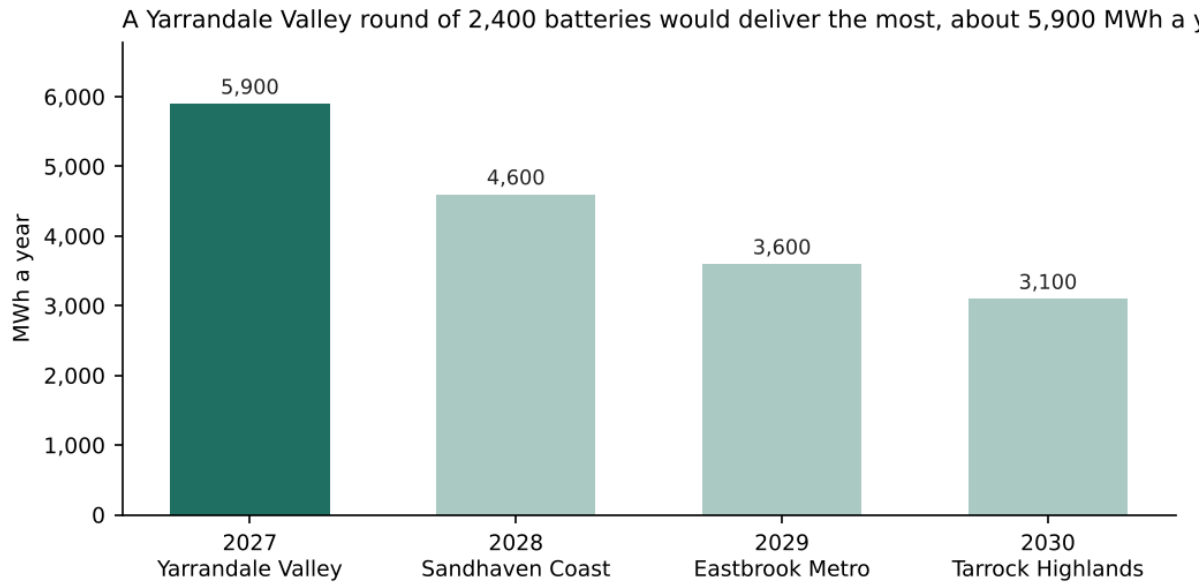

Programme battery 10 kWh, 5 kW, simulated hour by hour on the 2025 panel readings; export-limited homes valued on their rebuilt solar.

Readiness. On 30 September 2026, 4,381 homes in Yarrandale Valley were eligible for its round under the guideline, and installers accredited through 2027 fitted 292 batteries there in 2025. The 2024 pilot batteries delivered 324.6 MWh to their homes in the first quarter of 2025 and 309.9 MWh in the fourth.

Detail by region, the eligible homes, the pilot by quarter and the 2025 installations are in battery_rounds_2027_2030.xlsx.